

— PRODUCT INFORMATION —

6LB6

Compactron Beam Pentode

**FOR TV HORIZONTAL-DEFLECTION
AMPLIFIER APPLICATIONS**

The 6LB6 is a compactron beam-power pentode primarily designed for use as the horizontal-deflection amplifier in color television receivers. It is characterized by having a very low knee voltage, high plate-to-screen ratio, and high peak current capability. These efficiency factors make the 6LB6 widely adaptable for use in circuits using shunt or variable-bias type regulation with B+ supply voltages from 240 to over 400 volts. Its low knee minimizes "snivets" without the necessity of supplying special voltages to the beam plates.

GENERAL

ELECTRICAL

Cathode - Coated Unipotential
 Heater Characteristics and Ratings
 Heater Voltage, AC or DC* . . . 6.3±0.6 Volts
 Heater Current† 2.25 Amperes
 Direct Interelectrode Capacitances, approximate§
 Grid-Number 1 to Plate: (g1 to p) . 0.44 pf
 Input: g1 to (h + k + g2 + b.p.) . 33 pf
 Output: p to (h + k + g2 + b.p.) . 18 pf

MECHANICAL

Operating Position - Any
 Envelope - T-12, Glass
 Base - E12-74, Button 12-Pin
 Top Cap - C1-2, Skirted Miniature
 Outline Drawing - EIA 12-90
 Maximum Diameter 1.563 Inches
 Minimum Diameter 1.437 Inches
 Maximum Over-all Length. 4.375 Inches
 Maximum Seated Height 4.000 Inches
 Minimum Seated Height 3.750 Inches


MAXIMUM RATINGS

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

PHYSICAL DIMENSIONS

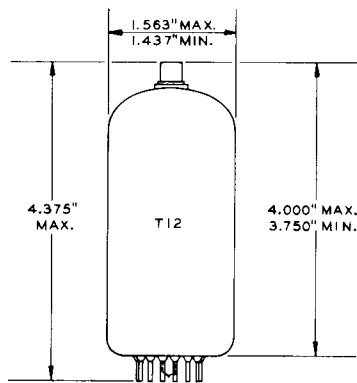


EIA 12-90

TERMINAL CONNECTIONS

- Pin 1 - Heater
- Pin 2 - Cathode
- Pin 3 - Grid Number 2 (Screen)
- Pin 4 - Beam Plates
- Pin 5 - Grid Number 1
- Pin 6 - No Connection
- Pin 7 - Internal Connection - Do Not Use
- Pin 8 - No Connection
- Pin 9 - Internal Connection - Do Not Use
- Pin 10 - Beam Plates
- Pin 11 - Internal Connection - Do Not Use
- Pin 12 - Heater
- Cap - Plate

BASING DIAGRAM

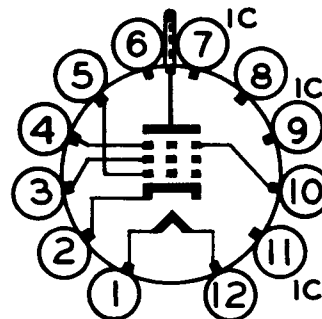

EIA 12GJ

MAXIMUM RATINGS (Cont'd)

HORIZONTAL-DEFLECTION AMPLIFIER SERVICE†—

DESIGN-MAXIMUM VALUES UNLESS OTHERWISE INDICATED

DC Plate-Supply Voltage (Boost + DC Power Supply)	990	Volts
Peak Positive Pulse Plate Voltage (Absolute Maximum Value)	7000	Volts
Peak Negative Pulse Plate Voltage	100	Volts
Positive DC Beam Plate Voltage	0	Volts
Screen Voltage	200	Volts
Peak Negative Grid-Number 1 Voltage	300	Volts
Plate Dissipation# (Absolute Maximum Value)	30	Watts
Screen Dissipation	5.0	Watts
DC Cathode Current	315	Milliamperes
Peak Cathode Current	1100	Milliamperes
Heater-Cathode Voltage			
Heater Positive with Respect to Cathode			
DC Component	100	Volts
Total DC and Peak	200	Volts
Heater Negative with Respect to Cathode			
Total DC and Peak	200	Volts
Grid Number 1 Circuit Resistance			
With Feedback-Type High Voltage Regulation	1.2	Megohms
With Shunt-Type High Voltage Regulation (Switching Mode)	10.0	Megohms
Beam Plate Circuit Resistance	0	Ohms
Bulb Temperature Δ	200	C

CHARACTERISTICS AND TYPICAL OPERATION

AVERAGE CHARACTERISTICS

Plate Voltage	5000	45	50	150	Volts
Beam Plates Connected to Cathode at Socket						
Screen Voltage	110	160	110	110	Volts
Grid-Number 1 Voltage	---	0	---	-20	Volts
Plate Resistance, approximate	---	---	---	6600	Ohms
Transconductance	---	---	---	13400	Micromhos
Plate Current	---	900**	560**	105	Milliamperes
Screen Current	---	110**	46**	2.0	Milliamperes
Grid-Number 1 Voltage, approximate						
I _b = 1.0 Milliamperes	-125	---	---	-40	Volts
Triode Amplification Factor $\ddagger\ddagger$	---	---	---	4.0	


NOTES

- * The equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance.
- ‡ Heater current of a bogey tube at E_f = 6.3 volts.
- § Without external shield.
- ¶ For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.
- # In stages operating with grid-leak bias, an adequate cathode-bias resistor or other suitable means is required to protect the tube in the absence of excitation.
- Δ Measured using a thermocouple attached to a 0.1-inch wide phosphor-bronze ring placed at the hottest location on the bulb.
- ** Values measured by a method involving a recurrent waveform such that the plate and screen dissipation will be kept within ratings in order to prevent damage to the tube.
- ‡‡ Triode connection (screen tied to plate) with E_b = E_{c2} = 125 volts, and E_{c1} = -25 volts.

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an

express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.


AVERAGE PLATE CHARACTERISTICS

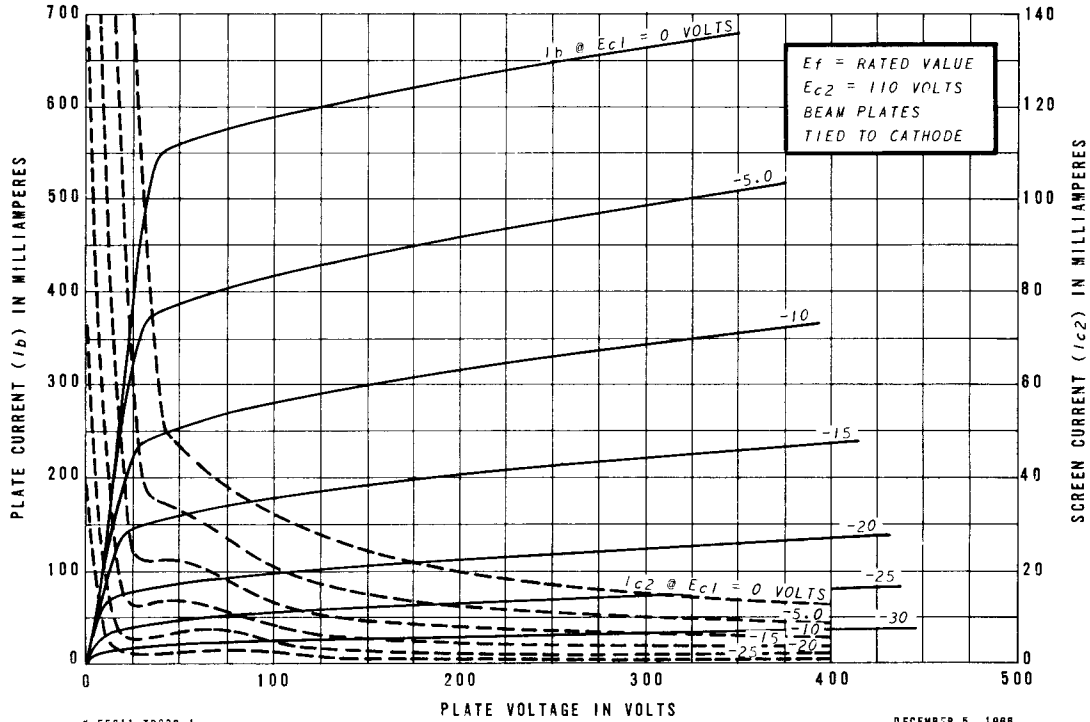

K-55811-TD338-1

DECEMBER 5, 1966


AVERAGE PLATE CHARACTERISTICS

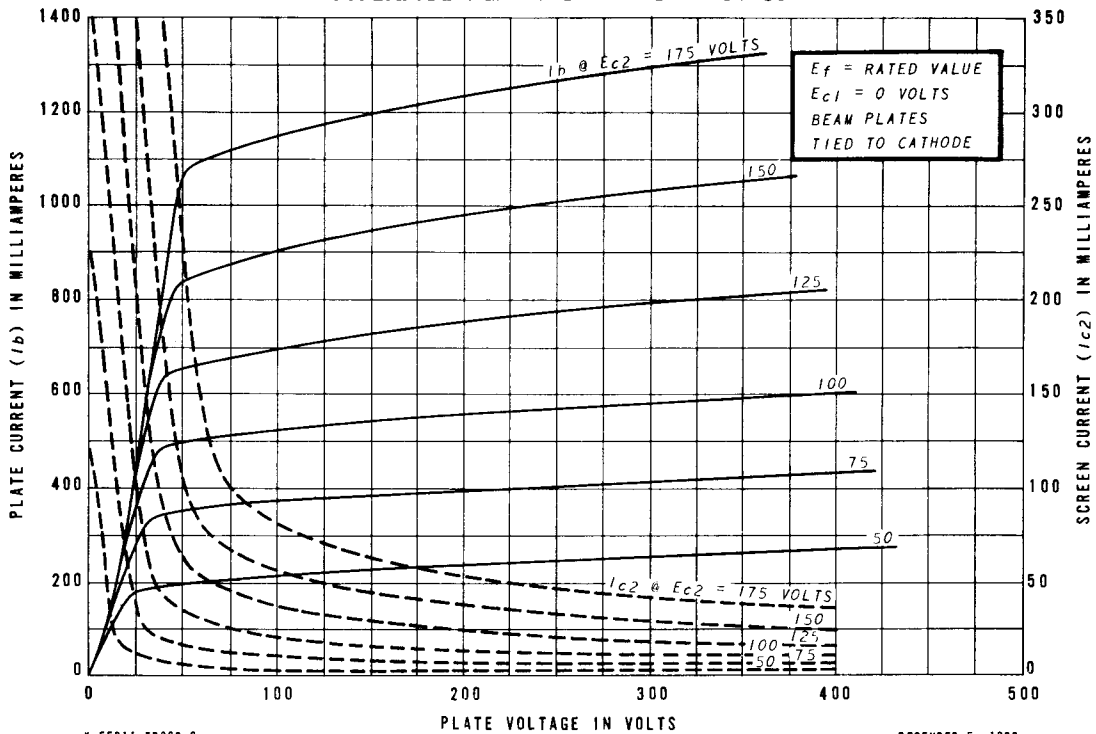


K-55811-TD338-2

DECEMBER 5, 1966

AVERAGE TRANSFER CHARACTERISTICS

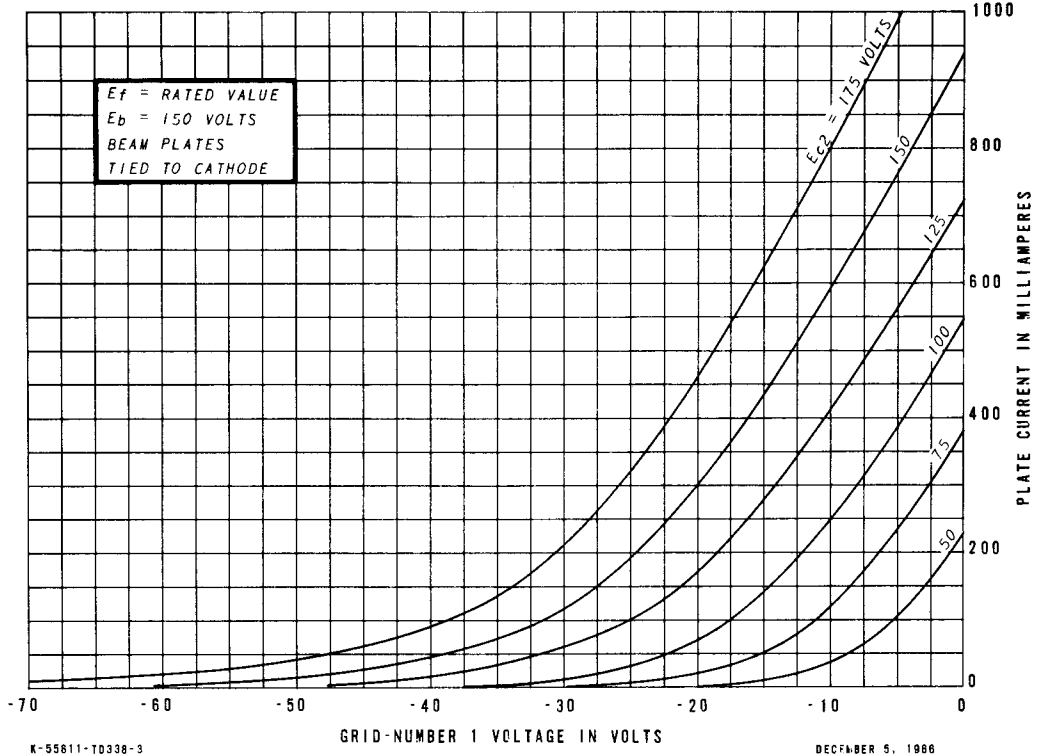

AVERAGE TRANSFER CHARACTERISTICS

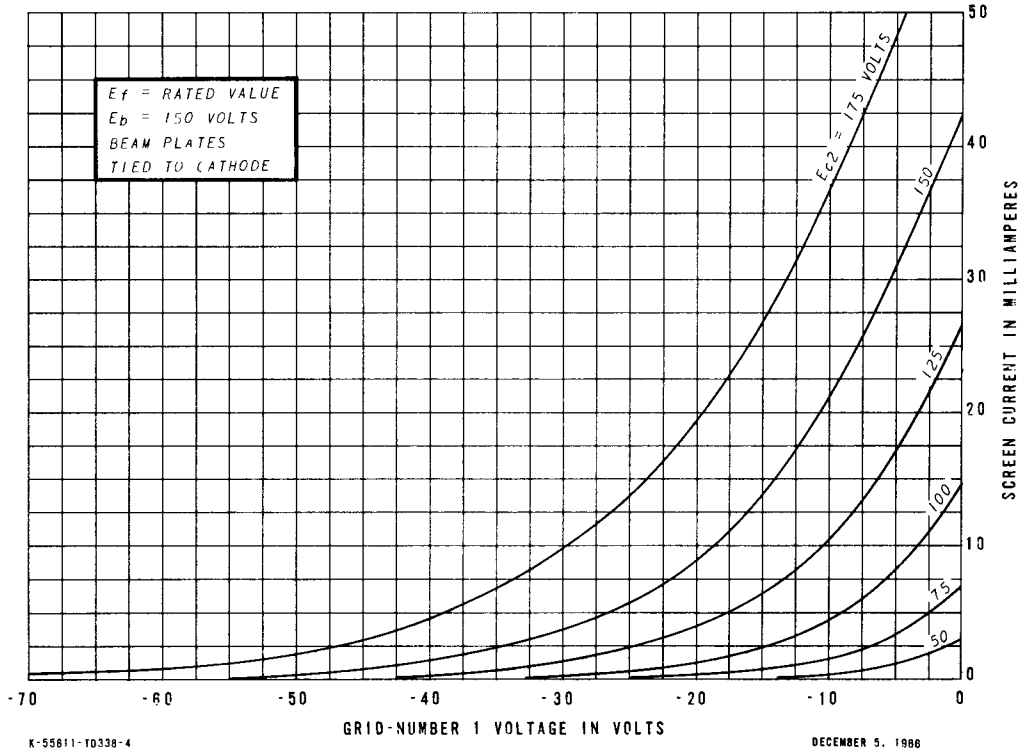

TUBE DEPARTMENT



Owensboro, Kentucky