



DIMENSIONS:	
A	4.030" ±0.063
B	2.250" ±0.125
C	2.630" ±0.063
D	3.560" ±0.063
E	1.076" ±0.063
F	3.100" ±0.063
G	0.187" ±0.015

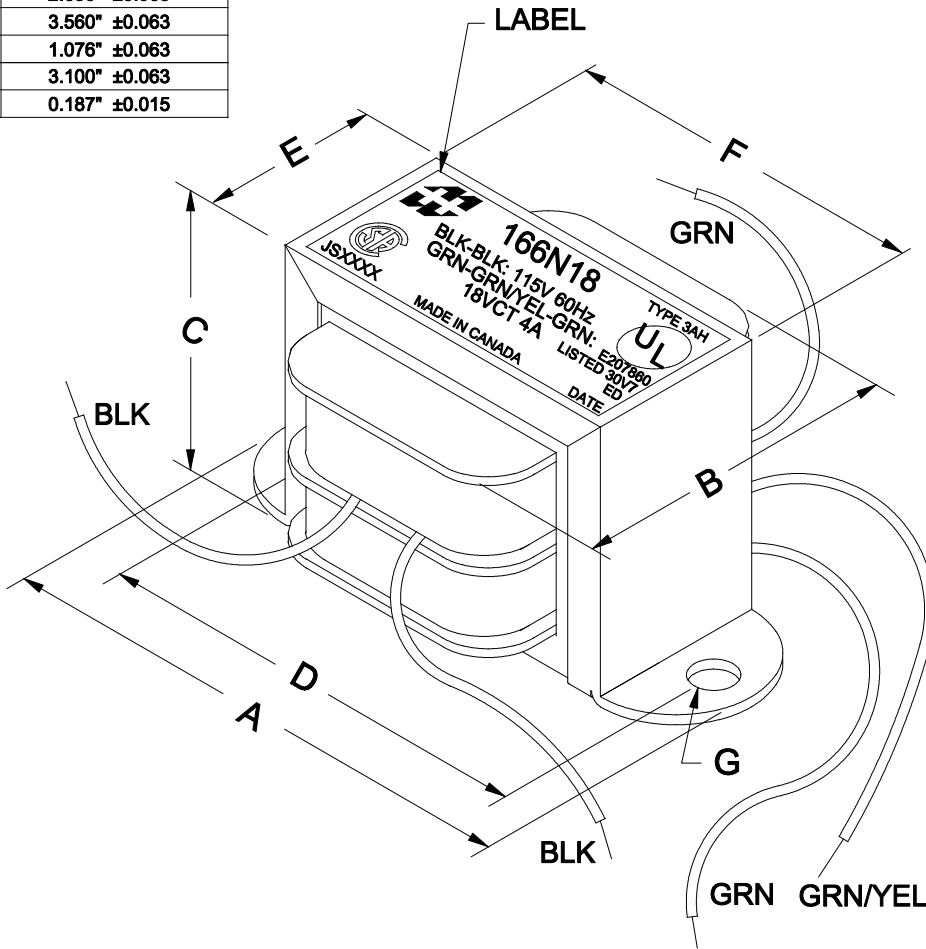

Weight : 2.615 lbs

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 115V, 60Hz, BLK - BLK	130mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	GRN - GRN =	19.75V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	9.870V ±2%
DCR	@ 20°C, BLK - BLK =	6.205 Ω ±20%
	@ 20°C, GRN - GRN =	0.206 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION	
0	RELEASED.	D.H. 11/07/18	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5	
			PH # (519) 886-6181	
			FAX # (519) 886-9540	
			DWG. BY: D.Hutt	CHK'D BY:
			DATE: 11/07/18	APP'D. BY:
			DIMENSIONS: IN(X) MM()	
			TITLE: POWER TRANSFORMER	DWG. NO. 166N18